

CWC10 | CDC10



Professional Washer and Dryer

FEATURES WASHER

- Stainless steel outer and inner drum
- Industry-leading 440 G-Force extraction removes more moisture, minimizing drying times and utility costs
- Totally freestanding: can be installed on any floor and any level
- Suspension with new out-of-balance logic
- Soap box with four compartments
- Door opens 180° for easy loading and unloading
- Standard with drain pump
- Top, front and side panels standard available in anthracite grey
- Electrical heating or boiler-fed
- 6 wash programs
- Possibility of programming cycle modifier (added prewash, extrawash time, extra rinse)

- LED indication of the status of the program
- Time remaining countdown

FEATURES DRYER

- Galvanized steel cylinder
- Oversized lint filter located in front for easy cleaning
- Powerful exhaust blower assures short drying times and low operating costs
- Wide door opening of 180° for easy loading and unloading
- Top, front and side panels standard available in anthracite grey
- Electrical or gas heating
- 4 drying programs
- Led indication of the status of the program
- Time remaining countdown



COMPACT DESIGN
Saving the footprint



USER-FRIENDLY
Very simple and intuitive interface



COIN MACHINE
For your self-service applications




CWC10 Front load washer					
Washer	NF3JXASP403UN01	NF3JXASP403UG01	NF3JXASP403UG43	NF3JXASG403UG01	NF3JXASG403UG43
Cabinet	Stainless	Grey	Grey	Grey	Grey
Market	Europe/CE	Europe/CE	Europe/CE	Europe/CE	Europe/CE
Actuation	Prep for coin	Prep for coin	Prep for coin	Prep for coin	Prep for coin
Basket	Stainless	Stainless	Soap inject./Grey boot	Stainless	Soap inject./Grey boot
Drain	Pump	Pump	Pump	Gravity drain	Gravity drain ¹
Capacity	10.5 kg	10.5 kg	10.5 kg	10.5 kg	10.5 kg

¹Available in Q4/2024

CDC10 Dryer				
	ND3NXAGS403UN01	NDENXAGS303UG01	NDGNXAGS303UG01	ND3NXAGS403UG01
Cabinet	Stainless	Grey	Grey	Grey
Market	Europe/CE	Europe/CE	Europe/CE	Europe/CE
Actuation	Prep for coin	Prep for coin	Prep for coin	Prep for coin
Heating	Electric*	Electric*	Gas	Electric*
El. connection	400V/50Hz/3N	230V/50Hz/1N	230V/50Hz/1N	400V/50Hz/3N


CWC10		
Drum volume	l	96,8
Frequency controlled	kW	0,67
Extraction speed	rpm	1200
G-factor		440
ELECTRICAL CONNECTION		230v/50Hz/1N, 400v/50Hz/3N*
ELECTRICAL HEATING	kW	4,8
DIMENSIONS H*W*D	mm	1126×683×704
Net weight	kg	119
Volume (packed)	m³	0,77
Packed H*W*D	mm	1150x760x860
Gross weight	kg	128

CDC10		
Capacity	kg	10,5
Drum volume	l	198
ELECTRICAL HEATING	kW	5,2 (230V), 5,3 (400V)*
GAS HEATING	kW	7,3
MOTOR POWER	rpm	0,25
Exhaust	mm	102
DIMENSIONS H*W*D	mm	1126×683×711
Net weight	kg	74
Volume (packed)	m³	0,71
Packed H*W*D	mm	1150x760x860
Gross weight	kg	79

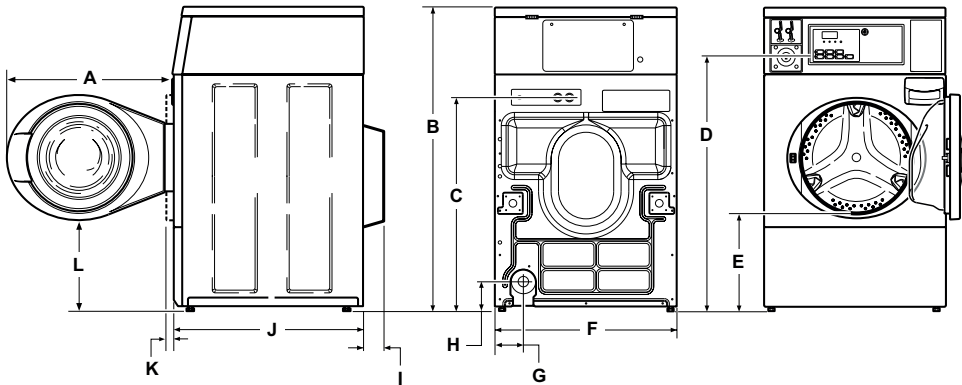

CWC10 Side CWC10 Back CWC10 Front

	A	B	C	D	E	F	G	H	I	J	K	L
CW10	611	1126	813	938	371	683	107	104	52	704	40	333
	H			W				D				

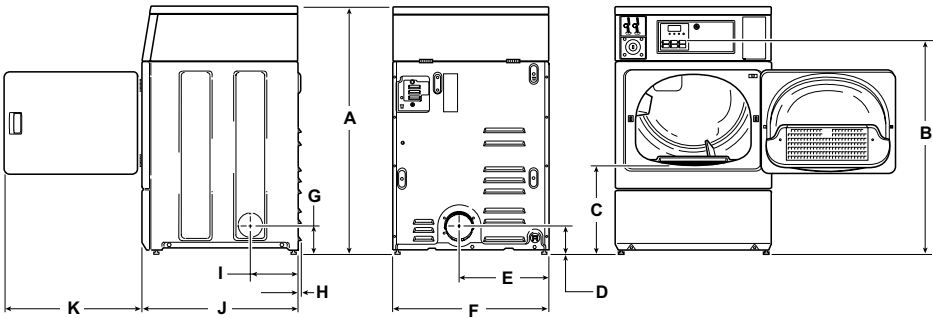

CDC10 Side CDC10 Back CDC10 Front

	A	B	C	D	E	F	G	H	I	J	K
CD10	1126	938	392	102	391	683	114	10	203	711	597
	H			W				D			