



IDR260 | IDR300 | IDR360

Tumble Dryer

FEATURES

- Frequency controlled motor
- Lint filter drawer for an user friendly maintenance
- Large door opening for easy loading and unloading
- Reversing drum as standard
- Standard galvanized drum with large diameter

OPTIONS

- Coin operated version (VEND)
- Stainless steel front panel
- Stainless steel drum
- Double door glass
- Residual moisture control:
 - electro conductivity of linen measured with ribs
 - safe drying of delicate linen and overdrying prevention

CONTROLS OPTIONS

- 3 tiers of controls available
 - Aries Micro - micro processor for VEND and OPL with 4 temperature levels
 - Aries Micro OPL - advanced microprocessor for OPL only with 9 editable programs
 - Evolis Elite - 5" multilingual touch screen for both OPL (99 programs and VEND (11 programs)
- Wifi as standard execution for Evolis Elite
- Cloud connectivity for 24/7 machine monitoring possible
- USB port for easy firmware updates, configuration and program uploads (Touch control)



LOW ENERGY CONSUMPTION

To save your bottom line



SHORTER DRYING CYCLES

For even more productive laundry operations



EXTENSIVE ERGONOMICS IMPROVEMENTS

For easier operation



MOISTURE SENSING

Innovative electro conductivity technology ensures higher accuracy and prevents overdrying



EXTRA LARGE DOOR OPENING

For easy loading and unloading




CONNECTIVITY

Integrated WiFi module as standard for Evolis Elite

YOUR SMART LAUNDRY PARTNER

		IDR260	IDR300	IDR360
CAPACITY				
Capacity 1:18	kg (lb)	14 (31)	16 (35)	20 (44)
Capacity 1:22	kg (lb)	11 (24)	13 (29)	16,5 (36)
Drum volume	l	250	285	360
Drum diameter	mm	760	760	760
AIRFLOW	m ³ /h	700	700	900
DRYING AVERAGE	g/min	210	210	270
MOTORS				
Fan	kW	0,37	0,37	0,37
Drive	kW	0,37	0,37	0,37
El. connection		208-240V 50/60Hz 1Ph - optional for gas and steam 208-240V 50/60Hz 3Ph - optional 380-415V +N 50/60Hz 3Ph - standard 380-415V 50/60Hz 3Ph - optional 440-480V 50/60Hz 3ph- optional		
ELECTRICAL HEATING				
Energy	kW	13,5	13,5	18
GAS HEATING				
Energy	kW	15	17,5	23
Gas connection	inch	½"	½"	½"
STEAM HEATING				
Steam connection		-	-	¾"
Steam pressure	bar			3-6/7-10
Exhaust	mm	Ø 200	Ø 200	Ø 200
DIMENSIONS				
H*W*D	mm	1750×795×1040	1750×795×1115	1750×795×1280
Net weight	kg	175	180	195
TRANSPORT DATA				
Packed H*W*D	mm	1880×855×1100	1880×855×1180	1880×855×1340
Gross weight	kg	195	200	215

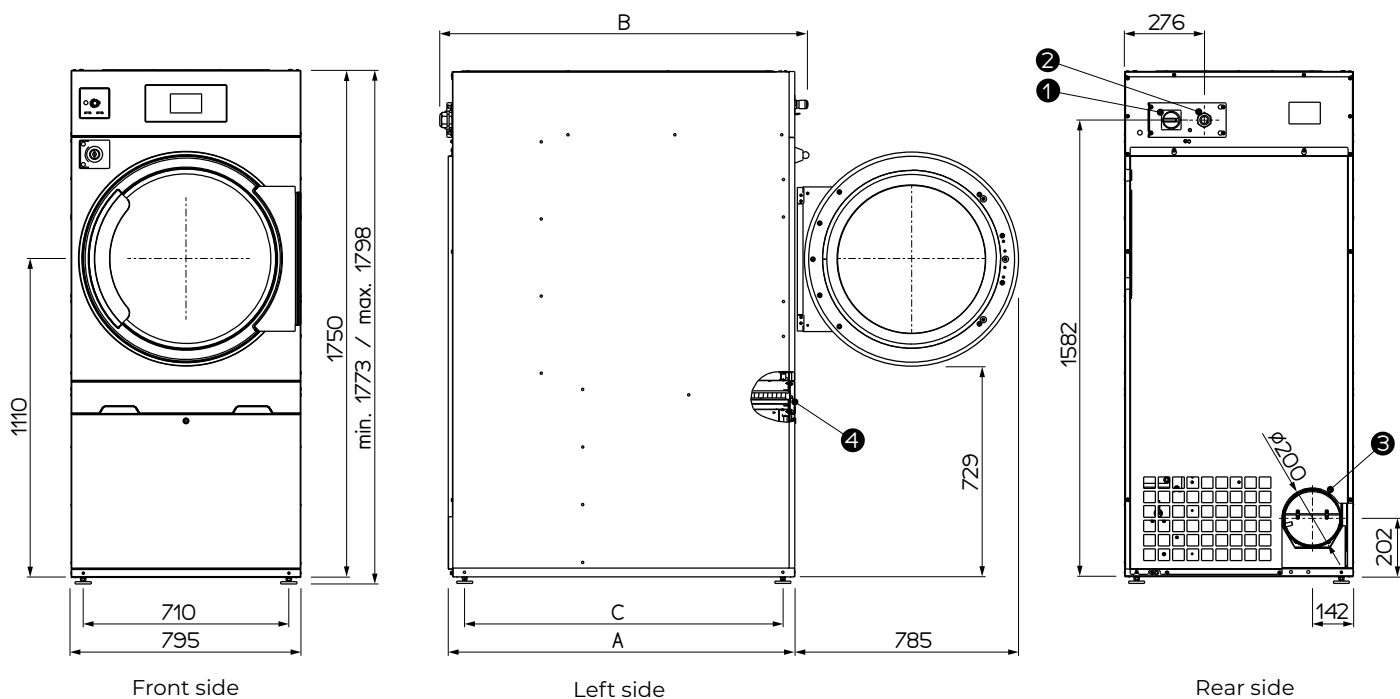

1. Main Switch
2. Main power supply
3. Exhaust
4. Filter

	A	B	C
IDR260	958	1040	861
IDR300	1036	1115	939
IDR360	1200	1280	1103