

FCI500

Cylinder Heated Ironer



FEATURES

- Large surface contact with linen over an angle of 300°
- Finger protection and emergency button for more safety
- Durable Meta Aramid ironing belts
- Automatic cooldown
- Reverse mode possible
- Frequency controlled motor
- Easy-to-remove lint filters
- Space saving installation against the wall is possible: front return
- Electric, gas or steam heating

OPTIONS

- Coin operated version
- Foot pedal for easy start and stop operation
- Chrome-plated cylinder for a better thermal conduction

CONTROLS OPTIONS

- Easy-to-operate microprocessor: 20 pre-set ironing programs
- Indication of ironing speed and temperature



LARGE SURFACE CONTACT WITH LINEN

over an angle of 300° for high ironing capacity




AUTO ADJUSTABLE IRONING SPEED TECHNOLOGY

according to the residual moisture



HIGHLY POLISHED STEEL THIN CYLINDER

Rapid response to temperature, excellent thermal conductivity

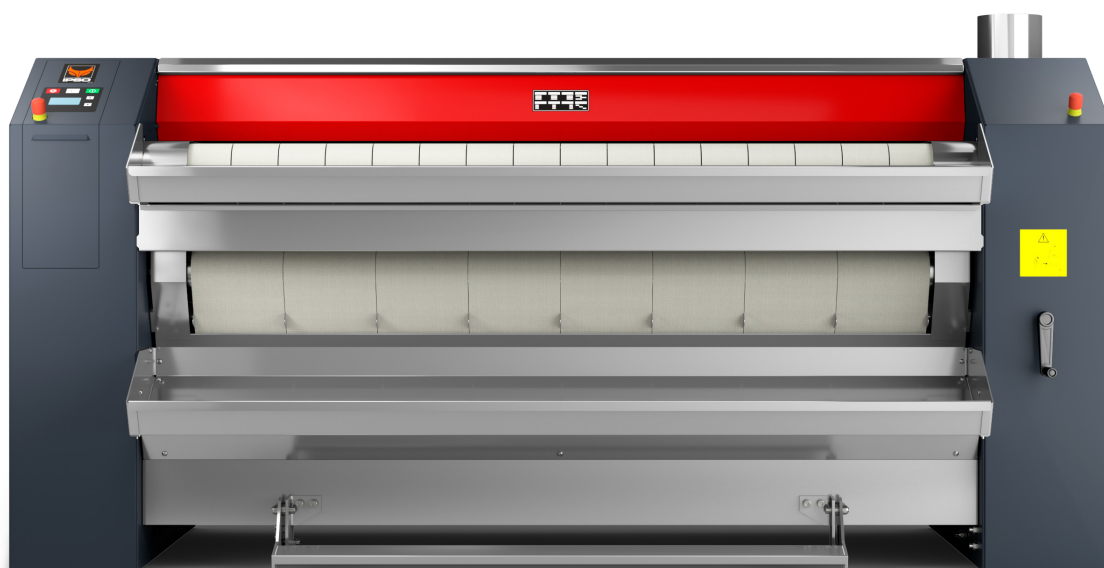

		FCI2000/500	FCI2600/500	FCI3200/500
ROLLER DIAMETER	mm	500	500	500
USEFUL ROLLER LENGTH	mm	2000	2600	3200
HEATING				
Electric	kW	37,2	54	64,8
Gas	kW	36	52	66
Steam	kg/h	49	68	88
MOTORS				
Roller	kW	0,37	0,37	0,37
Fan	kW	0,18/0,25	2×0,18/0,25	2×0,18/0,25
TOTAL INSTALLED POWER				
Electric		38	55,2	66
Gas		0,7	0,9	0,9
Steam		0,7	0,9	0,9
EXHAUST	mm	1×150	2×150	2×150
IRONING CAPACITY*				
Electrical & Gas heating	kg/h	80	95	120
Steam heating	kg/h	95	115	145
IRONING SPEED	m/min.	1,5-8	1,5-8	1,5-8
ELECTRIC CONNECTION				
380-415V 3AC+N 50/60 Hz, 208-240V 3AC 50/60 Hz 380-415V 3AC-N 50/60 Hz, 440V-480 3AC 60 Hz				
DIMENSIONS				
H×W×D	mm	1232×2750×1052	1232×3350×1087	1232×3950×1087
Net weight	kg	1150	1290	1590
TRANSPORT DATA				
Volume (crate packed)	m ³	4,97	6	7,03
H×W×D	mm	1550×2890×1100	1550×3490×1100	1550×4090×1100
Gross weight	kg	1350	1500	1850

* Tested in accordance of ISO 9398-1, The data concerning dimensions of machines include all extended parts

