

FCIF 500 | FCIR 500



Cylinder Heated Ironer

FEATURES

- Finger protection and emergency button for more safety
- Durable Meta Aramid ironing belts for higher temperature resistance
- Automatic cool down
- Indication of ironing speed and temperature
- Frequency controlled motor
- Easy to remove lint filters
- Reverse mode
- Standard anti-static bar (FCIF 500)
- EasyFold system - Requires less maintenance, no ribbons and rolls
- Front/Rear return selectable (FCIR 500)

OPTIONS

- Chrome-plated cylinder for a better thermal conduction and less maintenance
- Foot pedal with stop & reverse operation
- Rear return with output table (FCIF)

CONTROLS OPTIONS

- MCX- Easy to operate microprocessor with 20 pre-set ironing programmes.



LARGE SURFACE CONTACT WITH LINEN

over an angle of 300° for high ironing capacity



AUTO ADJUSTABLE IRONING SPEED TECHNOLOGY

according to the residual moisture



HIGHLY POLISHED STEEL THIN CYLINDER


Rapid response to temperature, excellent thermal conductivity




		FCIR2000/500	FCIF2600/500, FCIR2600/500	FCIF3200/500, FCIR3200/500
ROLLER DIAMETER	mm	500	500	500
USEFUL ROLLER LENGTH	mm	2000	2600	3200
HEATING				
Electric heating	kW	38	55	65
Gas heating	kW	36	52	66
Steam heating	kg/h	49	68	88
MOTORS				
Roller motor	kW	0,37	0,37	0,37
Fan motor	kW	0,18/0,255	2×0,18/0,255	2×0,18/0,255
IRONING CAPACITY*				
Electrical & Gas heating	kg/h	80	95	120
Steam heating	kg/h	95	115	145
ROLLER SPEED	m/min.	1,5-8	1,5-8	1,5-8
ELECTRIC CONNECTION				
		380-415V 3AC+N 50/60 Hz, 208-240V 3AC 50/60 Hz 380-415V 3AC-N 50/60 Hz, 440V-480 3AC 60 Hz	380-415V 3AC+N 50/60 Hz, 208-240V 3AC 50/60 Hz 380-415V 3AC-N 50/60 Hz, 440V-480 3AC 60 Hz	380-415V 3AC+N 50/60 Hz, 208-240V 3AC 50/60 Hz 380-415V 3AC-N 50/60 Hz, 440V-480 3AC 60 Hz
DIMENSIONS				
H×W×D	mm	1568×2750×1185	1568×3350×1185	1568×3950×1185
Net weight	kg	1290	1440	1680
TRANSPORT DATA				
Volume (packed)	m ³	7,14	8,62	10,13
Packed H×W×D	mm	1900×2890×1300	1900×3490×1300	1900×4100×1300
Gross weight	kg	1520	1700	2000

* Tested in accordance of ISO 9398-1, The data concerning dimensions of machines include all extended parts


FRONT FCIF/ FCIR

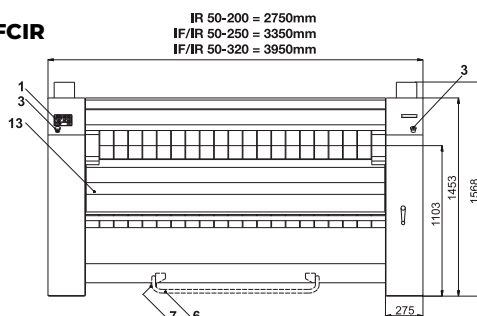


FCIF




TOP FCIF/ FCIR

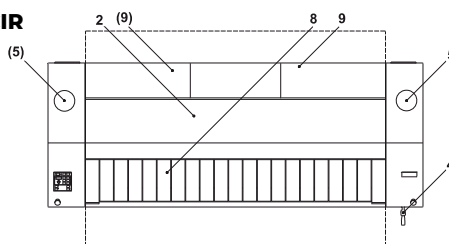


FCIR




BACK FCIF/ FCIR MODEL S

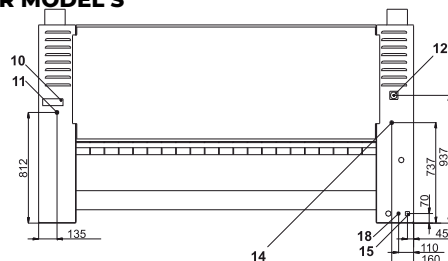

MODEL E



MODEL G



- | | | |
|---|--|--|
| 1. Control panel | 9. Cover of filter sieve | 18. Main supply of electric power |
| 2. Upper cover | 10. Name plate | 19. Gas supply G 3/4" (only for version "G") |
| 3. Centralstop | 11. Condense drain G 3/4" (only for version "S") | 20. Power supply for heating system (only for version "E") |
| 4. Manual drive of roller | 12. Main switch | 21. Output tilting table - rear (according to order) |
| 5. Exhaust ventilation | 13. Upper trough | 22. Output tilting trough - front |
| 6. Pedal used for starting/stopping belts movement (according to order, only for version OPL) | 14. Steam supply G 3/4" (only for version "S") | 23. Output tilting trough - rear |
| 7. Pedal microswitch (according to order, only for version OPL) | 15. External protective connector | |
| 8. Feeding belts/feeding table | 16. Output tilting table - front | |
| | 17. Bolts of side cover | |

Alliance Laundry Systems preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding. Consult your sales representative for availability.