

IY180 | IY240 | IY280



Softmount Washer-Extractor

FEATURES

- Stainless steel top and front panels, black side panels
- Stainless steel drum and tub
- Patented soap hopper
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- Smart Drum : Extra mechanical action thanks to the cascading shape of the surface
- Smart Wave: Optimized water and detergent consumption
- Large drain valve (Ø 76 mm)

OPTIONS

- Coin operated
- Stainless steel cabinet
- Liquid soap connection and pumps
- Water recovery kit
- Steam heating version
- 3rd water inlet
- Weighing System

CONTROL OPTIONS

- Evolis / Evolis Elite – fully programmable and customizable cycles 7" touch screen.
 - User-friendly screen with operating instructions built in as part of the control
 - Complete control content available in 34 languages
- Aries / Aries Elite – fully programmable control with 20 Pre-set programs and memory up to 99.
- Aries Micro – Programmable control with 6 programs (+2 cycle modifiers and Imbalance detection)



TOUCH CONTROL AVAILABLE

Multilingual user-friendly
7" touch control



500G EXTRACTION SPEED

Less moisture for a more efficient
drying process




CLOUD-BASED PLATFORM

to easily monitor your laundry
everywhere and at any time

YOUR SMART LAUNDRY PARTNER

		IY180	IY240	IY280
INNERDRUM				
Capacity 1:09	kg (lb)	20 (44)	27 (60)	31 (68)
Capacity 1:10	kg (lb)	18 (40)	24 (53)	28 (62)
Volume	litres	180	240	280
Diameter	mm	750	750	750
DRUM SPEED				
Wash	rpm	42	42	42
Extraction	rpm	1047	1035	975
G-FACTOR		460	450	400
HEATING				
Electricity	kW	12 - 18	12 - 18	21,9
Steam	bar	1-8	1-8	1-8
Hot water	°C	90	90	90
Sound pressure level	dB (A)	< 65	< 65	< 65
Water valves connection	BSP	3/4"	3/4"	3/4"
Water pressure	kPa	100-800	100-800	100-800
Rec. water pressure	kPa	300-500	300-500	300-500
Water inlet	l/min	20	20	20-50
Drain valve	outer Ø mm	76	76	76
Flow amount with drain valve	l/min	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800
DIMENSIONS				
Size H*W*D	mm	1430×970×970	1430×970×1105	1430×970×1185
Net weight	kg	380	430	495
TRANSPORT DATA				
Packed H*W*D	mm	1550×1025×1015	1550×1025×1150	1550×1025×1225
Gross weight	kg	395	450	515

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y
IY180	806	758	970	24	477	1430	90	48	970	906	1320	1297.5	1215	490	108.5	270	203	-	67	1315	80	293	610	218	113
IY240	806	758	970	24	477	1430	90	48	1105	1041	1320	1297.5	1215	490	108.5	270	203	-	67	1315	80	293	610	218	113
IY280	806	758	970	24	477	1430	90	48	1185	1116	1320	1297.5	1215	490	108.5	270	203	274	67	1315	80	293	610	218	113
	W				H				D																

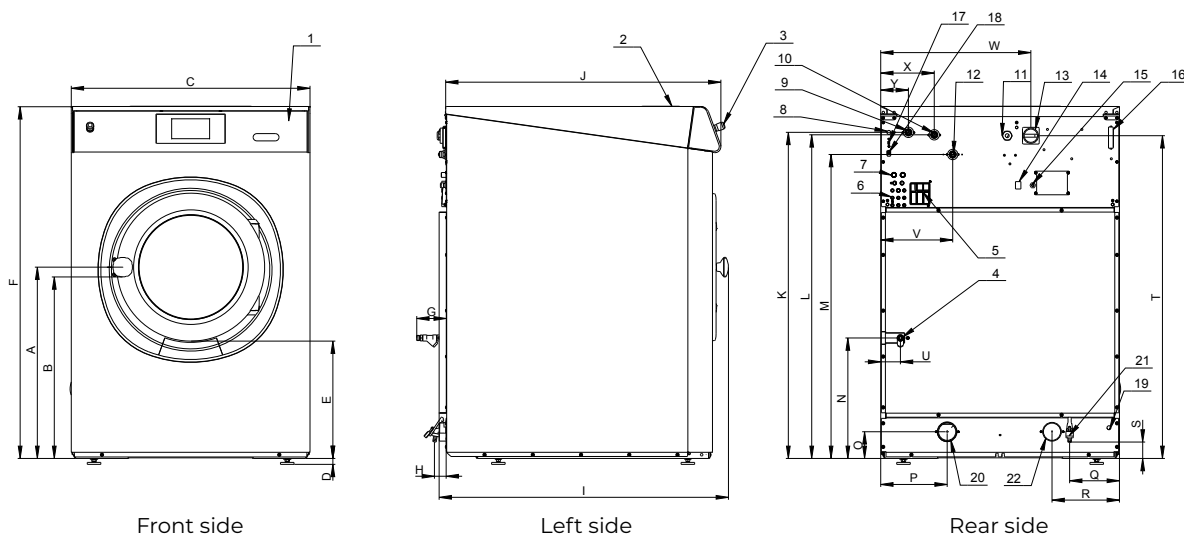

- | | | |
|-------------------------------------|--|--|
| 1. Control panel | 9. Cold water inlet, soft | 16. Fuses |
| 2. Soap dispenser | 10. Cold water inlet, hard | 17. USB port - optional |
| 3. Central stop button | 11. Electrical connection | 18. PC programming connection |
| 4. Steam connection | 12. Hot water inlet | 19. Discharge water cable inlet |
| 5. Air relieve | 13. Main switch | 20. Drain valve - 3 in. [76 mm] |
| 6. Liquid soap connection | 14. Heating change-over switch | 21. Water Sample - 1/2 in. (Applicable for wash bath sample-on request only) |
| 7. Recycle water inlet | 15. Liquid soap pump electrical connection | 22. Drain valve or return valve - 3" [76 mm] (IY280 models only) |
| 8. Recycled water valve cable inlet | | |

Alliance Laundry Systems preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding. Consult your sales representative for availability.