

IY65 | IY80 | IY105 | IY135



Softmount Washer-Extractor

FEATURES

- Stainless steel top and front panels, black side panels
- Stainless steel drum and tub
- Patented soap hopper
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- Smart Drum : Extra mechanical action thanks to the cascading shape of the surface
- Smart Wave: Optimized water and detergent consumption

OPTIONS

- Coin operated
- Stainless steel cabinet
- Liquid soap connection and pumps
- Water recovery kit
- Steam heating version
- 3rd water inlet

CONTROL OPTIONS

- Evolis / Evolis Elite – fully programmable and customizable cycles 7" touch screen.
 - User-friendly screen with operating instructions built in as part of the control
 - Complete control content available in 34 languages
- Aries / Aries Elite – fully programmable control with 20 Pre-set programs and memory up to 99.
- Aries Micro – Programmable control with 6 programs (+2 cycle modifiers and Imbalance detection)



TOUCH CONTROL AVAILABLE

Multilingual user-friendly 7" touch control



500G EXTRACTION SPEED

Less moisture for a more efficient drying process




CLOUD-BASED PLATFORM

to easily monitor your laundry everywhere and at any time


YOUR SMART LAUNDRY PARTNER

		IY65	IY80	IY105	IY135
INNERDRUM					
Capacity 1:09	kg (lb)	7 (15)	8,5 (19)	12 (26)	15 (33)
Capacity 1:10	kg (lb)	6,5 (14)	7,5 (17)	10,5 (23)	13,5 (30)
Volume	litres	65	75	105	135
Diameter	mm	530	530	620	620
DRUM SPEED					
Wash	rpm	49	49	49	49
Extraction	rpm	1298	1298	1200	1151
G-FACTOR		500	500	500	460
HEATING					
Electricity	kW	3 - 7	3 - 7	3 - 7	3 - 9
Steam	bar	1 - 8	1 - 8	1 - 8	1 - 8
Hot water	°C	90	90	90	90
Sound pressure level	dB (A)	< 65	< 65	< 65	< 65
Water valves connection	BSP	3/4"	3/4"	3/4"	3/4"
Water pressure	kPa	100-600	100-600	100-600	100-600
Rec. water pressure	kPa	300-500	300-500	300-500	300-500
Water inlet	l/min	20	20	20	20
Drain valve	outer Ø mm	76	76	76	76
Flow amount with drain valve	l/min	210	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800	100-800
DIMENSIONS					
Size H×W×D	mm	1135×710×740	1135×710×790	1245×795×795	1245×795×945
Net weight	kg	170	185	210	255
TRANSPORT DATA					
Packed H×W×D	mm	1245×750×840	1245×750×840	1345×835×840	1345×835×985
Gross weight	kg	180	200	235	275


	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	S	T	U	V	W	X	Y
IY65	612	564	710	24	349	1135	180	48	740	676	1030	1030	940	480	88	230	203	67	1030	42	293	390	218	113
IY80	612	564	710	24	349	1135	180	48	790	726	1030	1030	940	480	88	230	203	67	1030	42	293	390	218	113
IY105	648	600	795	24	342	1245	180	48	795	726	1140	1140	1050	506	88	230	203	67	1140	42	293	475	218	113
IY135	648	600	795	24	342	1245	180	48	945	876	1140	1140	1050	506	88	230	203	67	1140	42	293	475	218	113
	W			H			D																	

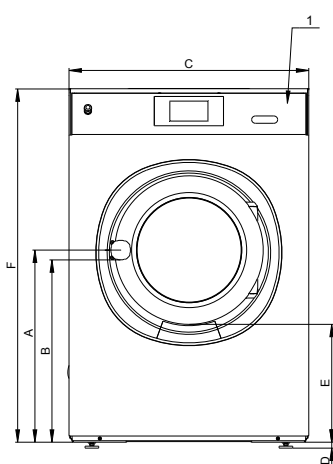

Front side

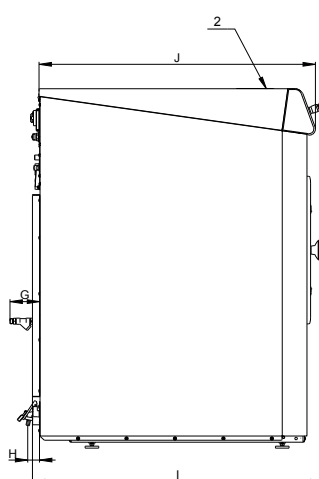

Left side

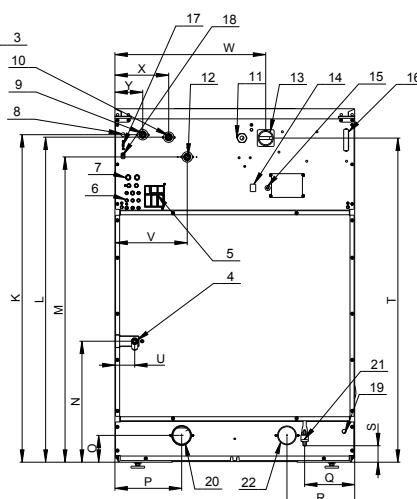

Rear side

- | | | |
|-------------------------------------|--|--|
| 1. Control panel | 9. Cold water inlet, soft | 16. Fuses |
| 2. Soap dispenser | 10. Cold water inlet, hard | 17. USB port - optional |
| 3. Central stop button | 11. Electrical connection | 18. PC programming connection |
| 4. Steam connection | 12. Hot water inlet | 19. Discharge water cable inlet |
| 5. Air relieve | 13. Main switch | 20. Drain valve - 3 in. [76 mm] |
| 6. Liquid soap connection | 14. Heating change-over switch | 21. Water Sample - 1/2 in. (Applicable for wash bath sample-on request only) |
| 7. Recycle water inlet | 15. Liquid soap pump electrical connection | |
| 8. Recycled water valve cable inlet | | |

Alliance Laundry Systems preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding. Consult your sales representative for availability.