

DR32 | DR35 | DR55 | DR75

Tumble Dryer



FEATURES

- Standard galvanized drum
- Stainless steel front panel with black painted door
- Large door opening for easy loading & unloading
- Self cleaning lint screen
- AutoDry capability for OPL

OPTIONS

- Coin operated
- Stainless steel drum
- Reversing drum

CONTROLS OPTIONS

- Evolis / Evolis Elite – fully programmable and customizable cycles 7" touch screen.
 - User-friendly screen with operating instructions built in as part of the control
 - Complete control content available in 34 languages
- Easy - To - Use Microprocessor - Dual Digital Control or OPL Micro
- Coin Operated Easy - To - Use Microprocessor



FIRE SUPPRESSION SYSTEM

For maximal safety of your operations



LOW ENERGY CONSUMPTION

Lower energy and utility costs, lower linen replacement costs



CLOUD-BASED PLATFORM

to easily monitor your laundry everywhere and at any time


		DR32	DR35	DR55	DR75
CAPACITY					
Capacity 1:18	kg (lb)	17(37)	19(43)	27(59)	35(77)
Capacity 1:22	kg (lb)	14(31)	16(35)	24(55)	29(64)
Drum volume	l	300	350	490	634
Drum diameter	mm	Ø 673	Ø 762	Ø 838	Ø 940
AIRFLOW	l/sec	240	260 - 280	330	380
MOTORS					
Fan	kW	0,40	0,40	0,40	0,40
Drive	kW	0,40	0,40	0,40	0,40
NOISE LEVEL	dBA	63 - 64	61	61	60
GAS HEATING					
Gas connection	NPT	1/2"	1/2"	1/2"	1/2"
Electrical connection					
Energy	kW	16.1 - 21.4	18.8 - 26.4	30.8 - 32.8	35.8 - 48.4
	kBTU/h	55 - 73	64 - 90	105 - 112	150
STEAM HEATING					
Steam connection	NPT	-	-	3/4"	3/4"
Electrical connection					
Steam pressure	bar	-	-	5.5 - 8.6	5.3 - 6.9
ELECTRICAL HEATING					
Electrical connection					
Energy	kW	12 - 21	9 - 24	18 - 27	21 - 36
EXHAUST	mm	150	150 - 200	200	200 - 250
DIMENSIONS					
H*W*D	mm	1625x800x1055	1625x800x1155	1700x870x1350	1960x980x1190
Net weight	kg	155 - 165	165 - 170	195 - 210	325 - 335
TRANSPORT DATA					
Packed H*W*D	mm	1995x825x1730	1720x840x1240	1790x900x1450	2120x1050x1420
Gross weight	kg	165 - 180	185	210 - 215	345 - 360

	A	B	C	D	E	F	G*	H*	I*	J	K
DR32	710	700	635	705	1055	1625	370	435	40	695	800
DR35	710	700	720	810	1155	1625	370	435	40	695	800
DR55	810	670	850	935	1350	1700	395	510	40	775	875
			D		H				W		

*Fire suppression system optional - may not be on machine.


	A	B	C	D	E*	F	G	H*	I*	J*	K	L
DR75	740	860	1190	1960	465	980	840	190	150	350	900	1000
			D	H	W							

*Fire suppression system optional - may not be on machine.

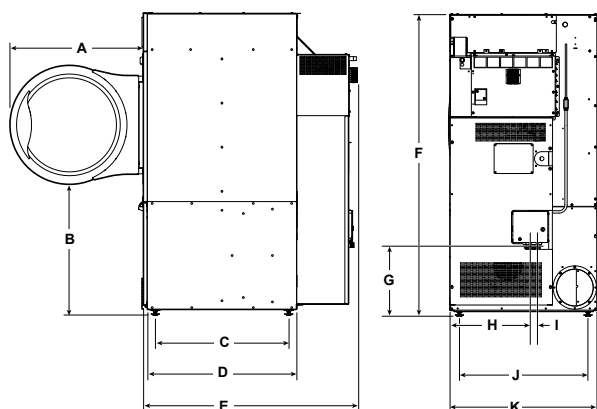

Right side

Rear side

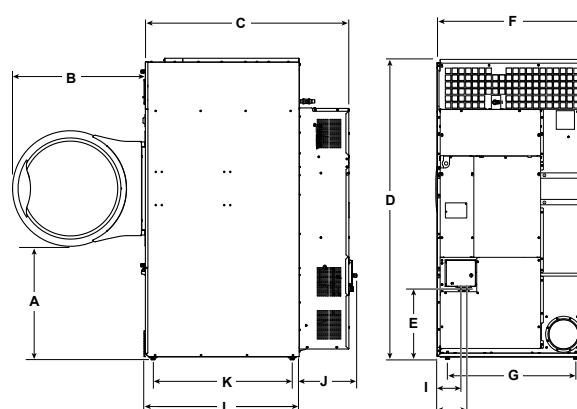

Right side

Rear side