

IDR190

Tumble Dryer



FEATURES

- Standard galvanized drum with large diameter
- Large door opening for easy loading & unloading

OPTIONS

- Coin operated
- Stainless steel front
- Reversing drum
- Double door glass and insulation
- Residual moisture control Sensodry:
 - safe drying of delicate linen
 - humidity detection in %
 - ideal in combination with SoftWash®
 - ideal for dry cleaners, fire depts
 - available on Easy and Full Control
- WiFi kit - to order through Accessories

CONTROLS OPTIONS

- Easy - To - Use Microprocessor (ECT) - intuitive control with simple selection of 3 programs
- Full Control Programmer (FCT) – fully programmable timer with possibility of residual moisture control



RADIAL AND AXIAL AIRFLOW

For maximal heat transfer, low energy consumption and short drying time



ECO VERSION

All dryers are available with reduced kW heating element




EXTRA LARGE DOOR OPENING

For easy loading and unloading

IDR190		
CAPACITY		
Capacity 1:18	kg (lb)	9(20)
Capacity 1:22	kg (lb)	8(18)
Drum volume	l	190
Drum diameter	mm	Ø 760
AIRFLOW		
AIRFLOW	m ³ /h	350
DRYING AVERAGE		
DRYING AVERAGE	l/min.	0,150
MOTORS		
Fan	kW	0,37
Drive	kW	0,18
GAS HEATING		
Gas connection	inch	1/2"
Electrical connection		3x380 - 415V 50/60Hz, 3x220 - 240V 50Hz 3x208 - 240V 60Hz, 3x440V 60Hz
Energy	kW	12,5
	kBTU/h	42,7
ELECTRICAL HEATING		
Electrical connection		3x380 - 415V 50/60Hz 3x220 - 240V 50Hz 3x208 - 240V 60Hz, 3x440V 60Hz 3x480V 60Hz
Energy	kW	9/12
EXHAUST		
EXHAUST	mm	Ø 200
DIMENSIONS		
H*W*D	mm	1465x795x815
Net weight	kg	170
TRANSPORT DATA		
Packed H*W*D	mm	1570x880x885
Gross weight	kg	180

The data concerning dimensions of machines include all extended parts

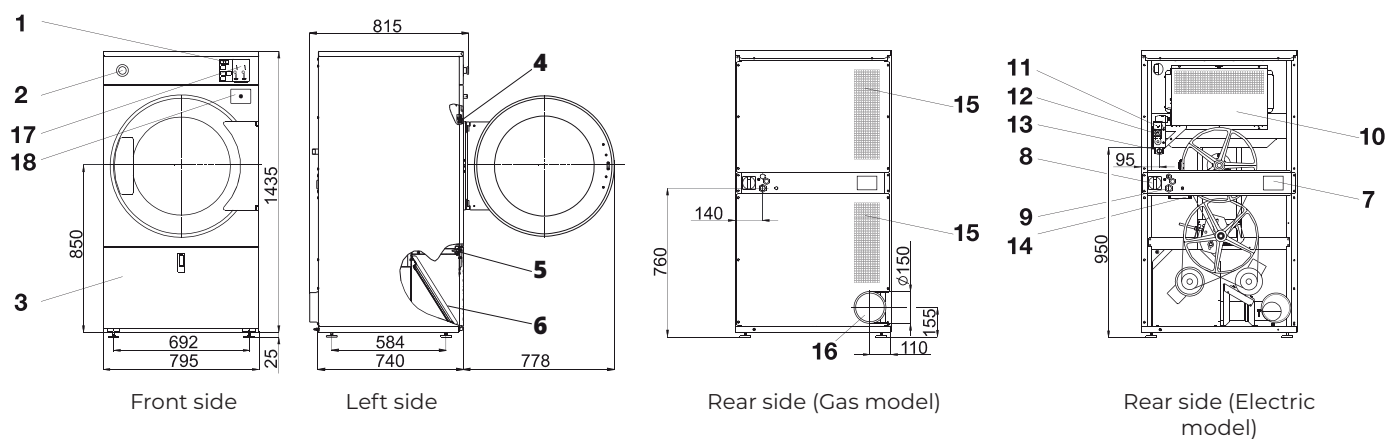

1. Programmer
2. Emergency stop button (not applicable for version with coin meter)
3. Lint screen cover
4. Door lock microswitch
5. Lint cover microswitch
6. Lint screen
7. Name plate
8. Main switch
9. Main power supply

10. Heating chamber
11. Gas valve (G models only)
12. Pressure regulator (G models only)
13. Gas supply (G models only)
14. Airflow switch
15. Suction
16. Exhaust piping
17. Coin meter (version with coin meter)
18. Coin box (version with coin meter)